



DEEP CYCLE



LDC12-43

FEATURES&BENEFITS

- True deep cycle AGM-GEL technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate
- Carbon active material
- Electrolyte + Gel for longer cycle life
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration :long cycle life &High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
12	/	43.0	37.0	34.0	32.0	/	/	/

PHYSICAL SPECIFICATIONS

Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
267.5/10.5	77.5/3.05	171/6.73	171/6.73	10.1/22.3	T15(M5)	ABS

Operating Temperature Range		
Discharge	Charge	Storage
-20°C~55°C(-4°F~131°F)	0C~40°C(32°F-104°F)	-15°C~40°C(5°F~104°F)



IATF16949


ISO14001

ISO9001

LDC12-43

DEEP CYCLE AGM-GEL BATTERY

DIMENSIONS

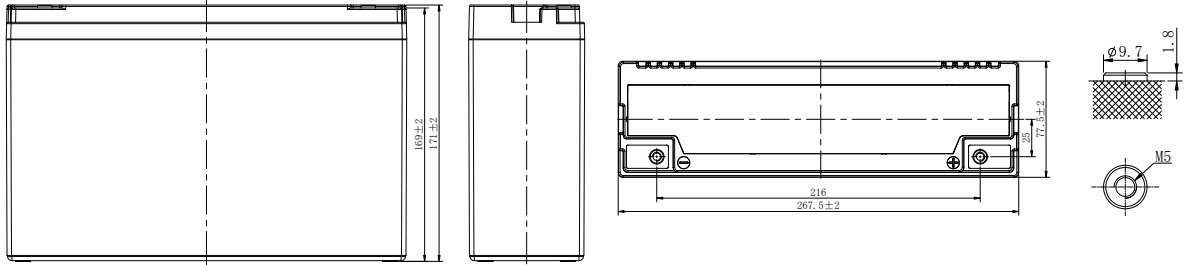


Terminal


Note: Terminal Torque Values in-lb(Nm):17.69-26.53(2.0-3.0)

PERFORMANCE CHARACTERISTICS


Charging Profile

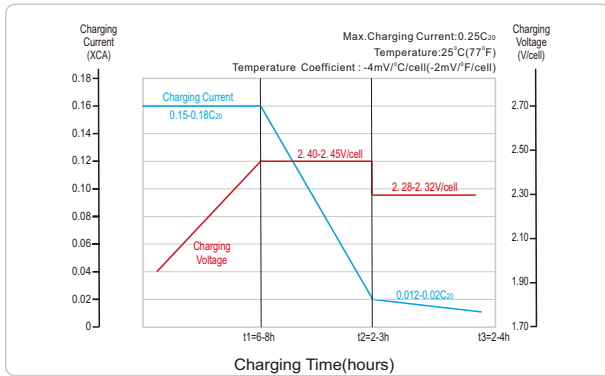


Relationship of OCV and State Of Charge(25°C, 77°F)

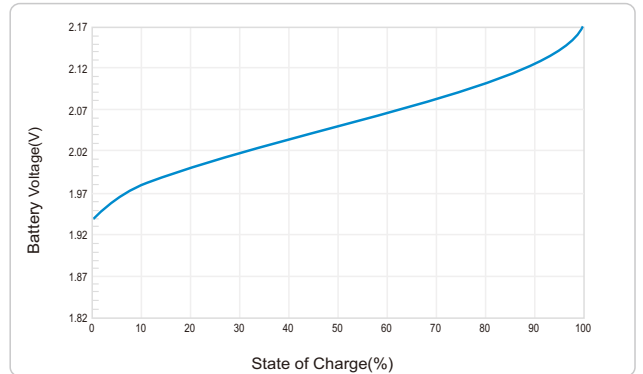

Cycle Life in Relation to Depth Of Discharge

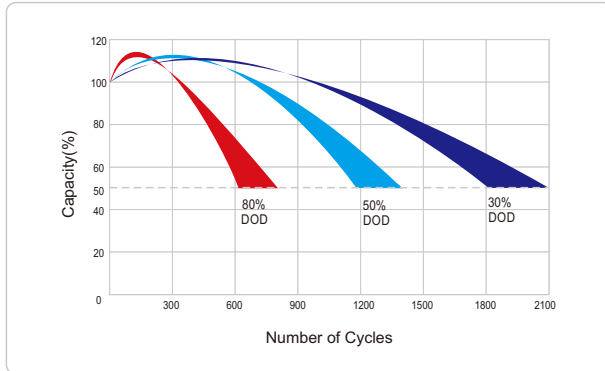

Self-discharge Characteristic

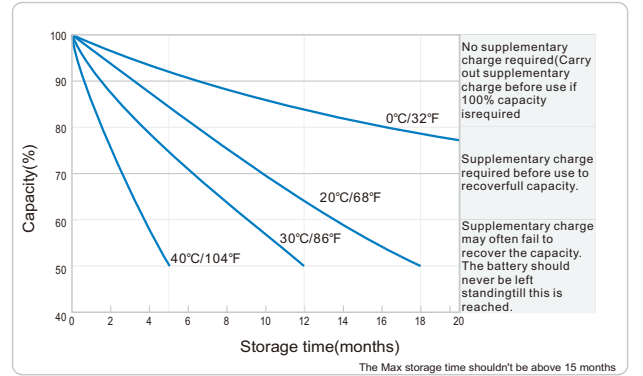

distributed by: Power Storage Deutschland GmbH

+49 (0)6081 96582-0

info@psd-power.de

www.psd-power.de

