

### Features Of LiFePO<sub>4</sub> Battery

**Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

**Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.


**Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

**Wider Temperature Range:** -20°C~60°C.

**Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.



### Physical Dimension-mm

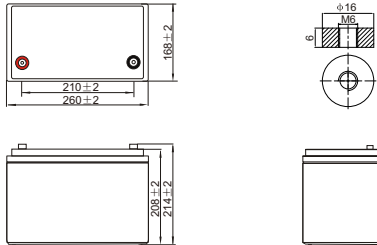


### Typical Applications

- Wheelchairs and scooters
- Solar/wind energy storage
- Back-up power for small UPS
- Golf trolleys & buggies
- Electric bikes
- Tools


### Specification

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	60Ah
	Energy	768Wh
	Internal Resistance(AC)	≤20mΩ
	Cycle Life	>3000 cycles @0.5C 80%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	14.6 ± 0.2V
	Charge Mode	0.2C to 14.6V, then 14.6V, charge current to 0.02C (CC/CV)
	Charge Current	30A
	Max. Charge Current	60A
	Charge Cut-off Voltage	14.6V ± 0.2V
Standard Discharge	Rated Discharge Current	30A
	Max. Discharge Current	60A
	Discharge Cut-off Voltage	10V
Environmental	Charge Temperature	0 °C to 55 °C (32F to 131F) @60 ± 25% Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60 ± 25% Relative Humidity
	Storage Temperature	-20 °C to 45 °C (-4F to 113F) @60 ± 25% Relative Humidity
	IP Class	IP65
Mechanical	Plastic Case	ABS
	Approx. Dimensions	260mm*168mm*214mm (10.24in.*6.61in.*8.43in.)
	Approx. Weight	8.40kg (18.52lbs)
	Terminal	M6


Different Rate Discharge Curve(25°C)

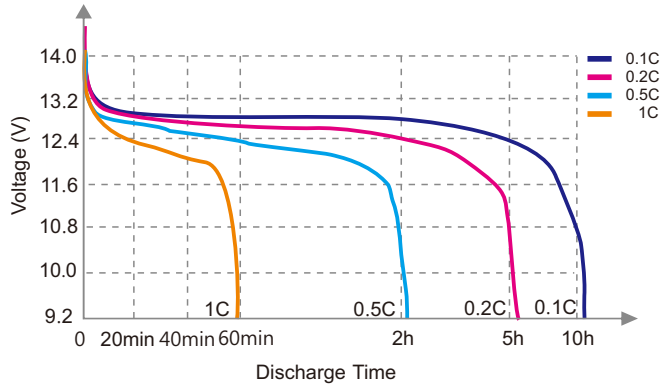


Different Temperature Discharge Curve(0.5C)

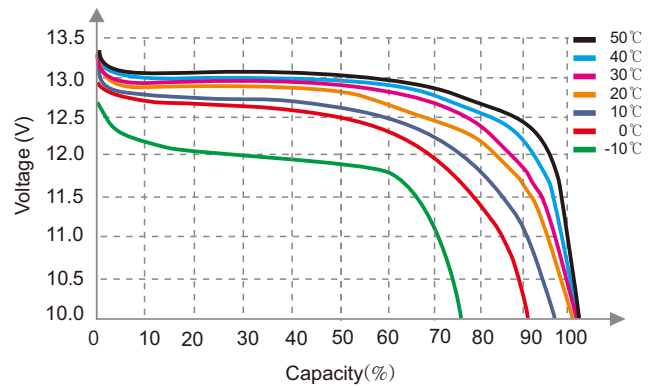


State of Charge Curve(0.5C, 25°C)

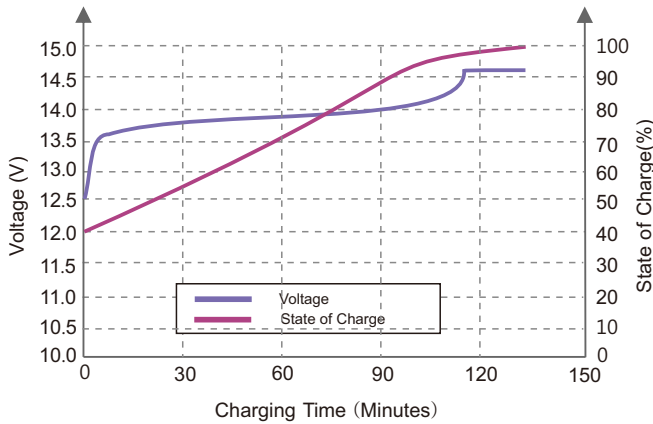

Charging Characteristics(0.5C, 25°C)

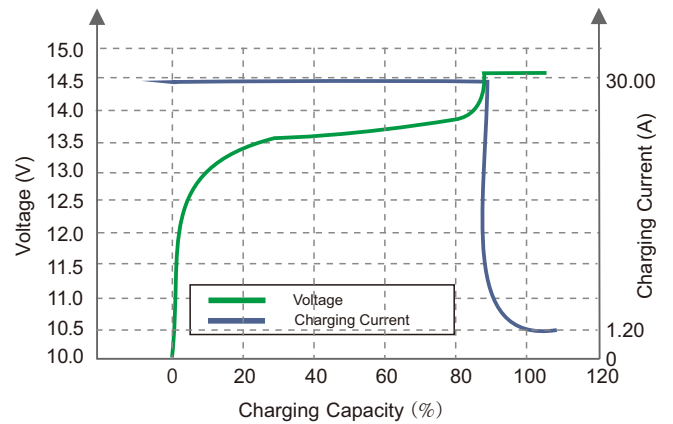

Different DOD Discharge Cycle Life Curve(0.5C)

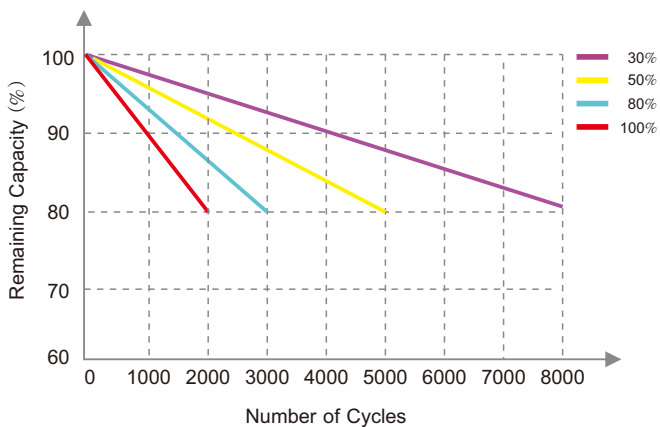

Different Temperature Self Discharge Curve

