

Lithium Iron Phosphate (LiFePO4) Battery LFeLi-2430M (25.6V30Ah)

Features Of LiFePO4 Battery

Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.


Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Temperature Range: -20°C~60°C.

Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.







Application

- Electric vehicles, electric mobility
- Solar/wind energy storage system
- Telecommunication
- Medical equipment
- Lighting


Specification

Electrical Characteristics	Nominal Voltage	25.6V
	Nominal Capacity	30Ah
	Energy	768Wh
	Internal Resistance(AC)	≤20m Ω
	Cycle Life	>3000 cycles @0.5C 80%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	29. 2±0.2V
	Charge Mode	0.2C to 29.2V, then 29.2V,charge current to 0.02C (CC/CV)
	Charge Current	15A
	Max. Charge Current	30A
	Charge Cut-off Voltage	29.2V±0.2V
Standard Discharge	Rated Discharge Current	15A
	Max. Discharge Current	30A
	Discharge Cut-off Voltage	20V ·
Environmental	Charge Temperature	0 $^{\circ}$ to 55 $^{\circ}$ (32F to 131F) $@60\pm25\%$ Relative Humidity
	Discharge Temperature	−20 $^{\circ}$ C to 60 $^{\circ}$ C (−4F to 140F) $@60\pm25\%$ Relative Humidity
	Storage Temperature	0 $^{\circ}$ C to 45 $^{\circ}$ C (32F to 113F) $@60\pm25\%$ Relative Humidity
	IP Class	IP65
Mechanical	Plastic Case	ABS
	Dimensions (in./mm.)	260*168*214mm (10.24"*6.61"*8.43")
	Weight (lbs./kg.)	8.50kg (18.739lbs)
	Terminal	M6




Different Rate Discharge Curve(25℃)


Different Temperature Discharge Curve(0.5C)

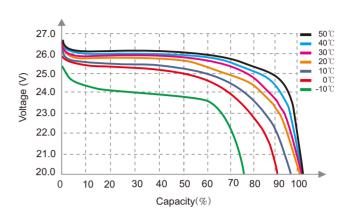


State of Charge Curve(0.5C, 25°C)

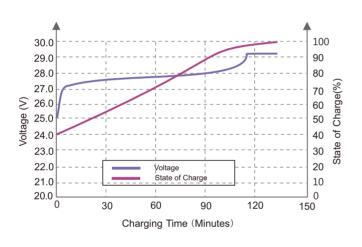

Charging Characteristics(0.5C, 25℃)

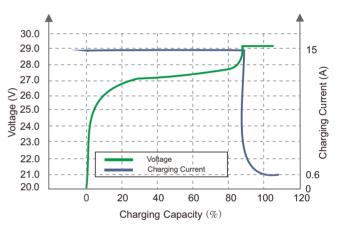


Different DOD Discharge Cycle Life Curve(0.5C)

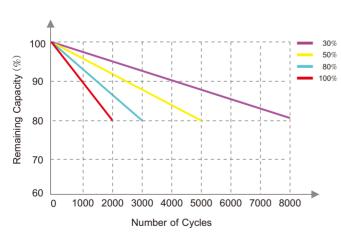

Power Storage Deutschland GmbH

Different Temperature Self Discharge Curve

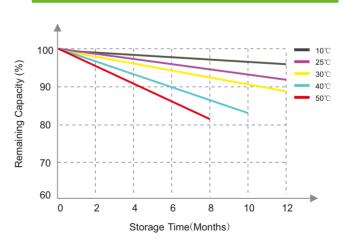

© 2022 LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice.

Publication No :LB-LFeLi-2430M-PD-EN-V2.0-202208



+49 (0)6081 96582-0



