




# LHT Series-High Temperature

## LHT2-800(2V800Ah)




### Specifications

Rated Voltage	2V	
Nominal Capacity	800Ah	(C <sub>10</sub> , 1.80V/cell)
Dimension	Length	410±3mm (16.1 inches)
	Width	175±2mm (6.89 inches)
	Container Height	330±3mm (12.9 inches)
	Total Height	350±3mm (13.8 inches)
Approx Weight	50.4 Kg (111.0 lbs)	
Terminal	M8	
Container Material	PC-ABS flame retardant jar and cover to UL94 V-0	
Rated Capacity (35°C)	848.0 Ah	(20hr, 42.4A, 1.80V/cell)
	800.0 Ah	(10hr, 80.0A, 1.80V/cell)
	710.5 Ah	(5hr, 142.1A, 1.75V/cell)
	636.0 Ah	(3hr, 212.0A, 1.75V/cell)
	512.9 Ah	(1hr, 512.9A, 1.60V/cell)
Max. Discharge Current	6400A	
Internal Resistance (35°C)	Approx 0.4mΩ	
Operating Temp. Range	Discharge	-40 ~ 65°C (-40 ~ 149°F)
	Charge	-20 ~ 45°C (-4 ~ 113°F)
	Storage	-20 ~ 50°C (-4 ~ 122°F)
Nominal Operating Temp. Range	25±10°C (77±18°F)	
Cycle Use	Initial Charging Current less than 200A. Voltage 2.30V~2.40V at 35°C(95°F) Temp. Coefficient -5mV/°C	
	Initial Charging Current less than 200A. Voltage 2.20V~2.27V at 35°C(95°F) Temp. Coefficient -3mV/°C	
Standby Use	Initial Charging Current less than 200A. Voltage 2.20V~2.27V at 35°C(95°F) Temp. Coefficient -3mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	35°C (95°F)	100%
	0°C (32°F)	79%
Self Discharge	LHT series batteries may be stored for up to 9 months at 35°C(95°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

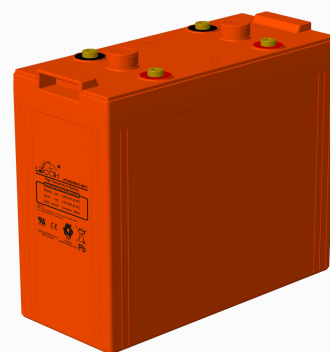

### Layout

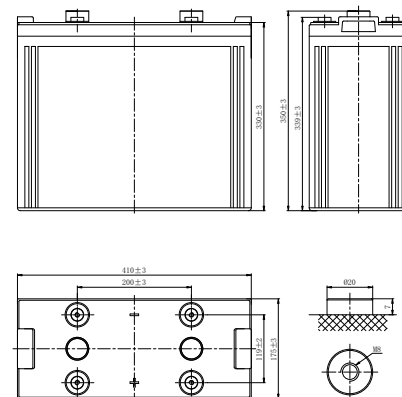

### Constant Current Discharge (Amperes) at 35 °C (95°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	933.4	792.0	722.9	650.4	547.2	448.0	376.8	249.6	192.5	155.4	131.0	114.3	91.2	76.5	40.5
1.80V/cell	1136.0	926.4	823.8	732.0	603.2	486.4	408.5	266.4	202.1	162.0	136.5	118.4	95.0	80.0	42.4
1.75V/cell	1327.7	1065.6	932.0	820.8	660.8	530.1	446.1	281.6	212.0	170.0	142.1	122.8	97.6	81.6	43.2
1.70V/cell	1519.5	1195.2	1030.1	892.8	710.4	562.1	472.0	295.6	221.3	176.0	146.3	126.7	100.5	83.6	44.3
1.67V/cell	1631.3	1286.4	1110.4	960.0	752.0	586.7	492.0	307.2	228.4	181.0	150.3	129.6	101.8	85.0	45.0
1.60V/cell	1776.0	1377.6	1177.6	1008.0	785.6	612.3	512.9	318.8	233.8	185.0	153.5	132.0	103.6	85.8	45.4

### Constant Power Discharge(Watts/cell) at 35 °C (95°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1743.2	1490.0	1368.7	1237.1	1045.8	861.4	728.8	485.5	376.2	304.8	258.1	225.8	181.0	152.1	80.6
1.80V/cell	2086.9	1717.5	1539.6	1377.6	1143.5	929.0	785.7	515.7	393.1	316.7	267.7	233.0	188.0	158.9	84.3
1.75V/cell	2396.6	1944.2	1717.2	1527.1	1243.2	1006.6	854.2	543.0	411.3	331.2	277.7	240.9	192.7	161.9	85.9
1.70V/cell	2697.0	2150.2	1878.6	1646.9	1325.3	1060.0	899.0	567.6	427.8	341.4	285.1	248.1	198.2	165.7	87.9
1.67V/cell	2843.3	2279.8	1999.8	1751.8	1392.4	1100.0	931.9	587.3	439.5	350.0	291.9	253.1	200.2	168.1	89.2
1.60V/cell	3031.6	2393.6	2085.8	1818.4	1440.0	1137.3	964.7	605.7	447.5	356.1	296.8	257.0	203.4	169.4	89.8



# LHT Series-High Temperature

## LHT2-800(2V800Ah)



### Applications

- Tele-communication base station
- High temperature station without air-condition
- Station in the open air
- Electric power system, UPS
- Solar energy, wind saving energy power supply


### General Features

- Battery design life up to 15 years at 35°C
- Special anti-high-temperature paste formula
- Special anti-high-temperature container
- Special double sealing and anti-high-temperature sealing agent
- High performance separator and special electrolyte formula


### Standards

- Compliance with IEC 60896 Certified
- Classified as "Very Long Life" according to Eurobat
- UL, CE Certified
- Manufactured in Leoch® IATF 16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities


### Discharge Characteristics

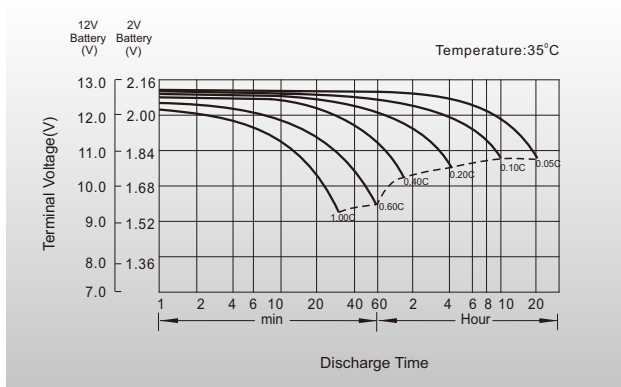


### Float Charging Characteristics

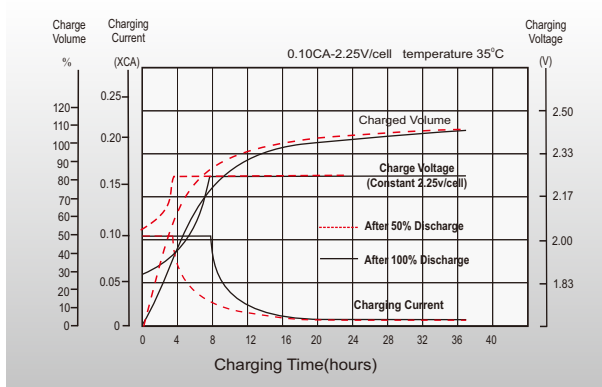

### Temperature Effects in Relation to Battery Capacity

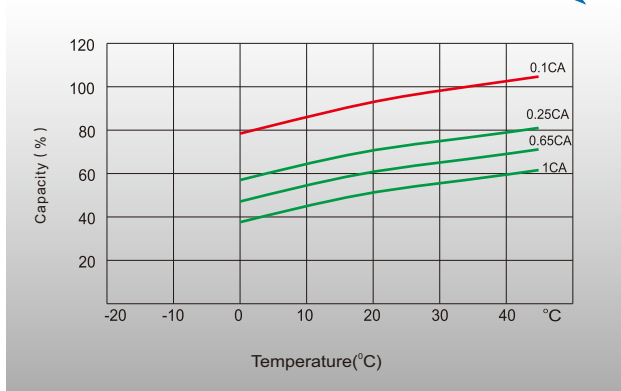

### Effect of Temperature on Long Term Float Life

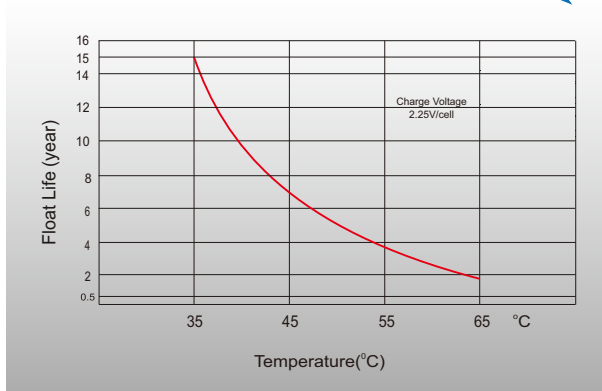

distributed by: Power Storage Deutschland GmbH

+49 (0)6081 96582-0

info@psd-power.de

www.psd-power.de



<http://www.leoch.com>

© 2022 LEOCH. All rights reserved.  
 Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
 Subject to revisions without prior notice.

Publication No.: LB-LHT2-800-PD-EN-V2.2-202209