




LP Series-General Purpose LP12-45(12V45Ah)




Specifications

Rated Voltage	12V	
Nominal Capacity	45.0Ah	(C ₁₀ , 1.80V/cell)
Dimension	Length	197±2mm (7.76 inches)
	Width	165±2mm (6.50 inches)
	Container Height	170±2mm (6.69 inches)
	Total Height	170±2mm (6.69 inches)
Approx Weight	14.2 Kg (31.3 lbs)	
Terminal	M6	
Container Material	ABS	
Rated Capacity (25°C)	47.8 Ah	(20hr, 2.39A, 1.80V/cell)
	45.0 Ah	(10hr, 4.50A, 1.80V/cell)
	39.4 Ah	(5hr, 7.88A, 1.75V/cell)
	35.7 Ah	(3hr, 11.9A, 1.75V/cell)
	30.2 Ah	(1hr, 30.2A, 1.60V/cell)
Max. Discharge Current	450A (5s)	
Internal Resistance (25°C)	Approx 9.0mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 13.5A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	Initial Charging Current less than 13.5A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LP series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Layout

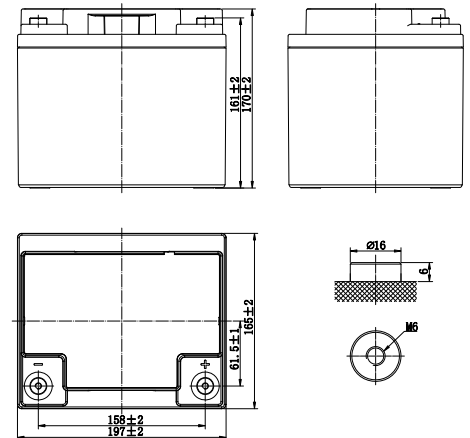

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	93.7	69.9	58.2	48.9	37.6	28.1	23.7	17.8	14.2	10.7	8.55	7.15	6.21	5.04	4.22	2.26
1.80V/cell	109.2	82.4	67.7	56.4	42.5	31.4	26.2	19.5	15.5	11.6	9.22	7.70	6.66	5.40	4.50	2.39
1.75V/cell	119.1	88.4	71.6	59.2	44.4	32.7	27.2	20.1	16.0	11.9	9.45	7.88	6.80	5.50	4.57	2.42
1.70V/cell	129.0	94.3	75.7	62.3	46.4	33.9	28.2	20.8	16.5	12.3	9.69	8.05	6.94	5.60	4.64	2.45
1.67V/cell	134.7	97.7	78.1	64.0	47.6	34.7	28.8	21.2	16.7	12.5	9.82	8.15	7.02	5.65	4.68	2.46
1.60V/cell	148.5	105.8	83.7	68.2	50.3	36.5	30.2	22.1	17.4	12.9	10.1	8.40	7.22	5.79	4.78	2.51

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	178.0	133.8	111.9	94.3	72.7	54.4	46.1	34.7	27.8	21.0	16.8	14.1	12.2	10.0	8.34	4.49
1.80V/cell	204.3	155.9	128.7	107.6	81.5	60.4	50.7	37.7	30.1	22.7	18.1	15.1	13.1	10.6	8.89	4.74
1.75V/cell	219.5	165.2	134.8	111.8	84.5	62.4	52.2	38.8	30.9	23.2	18.4	15.4	13.3	10.8	9.02	4.79
1.70V/cell	233.9	173.8	140.8	116.5	87.4	64.2	53.7	39.8	31.7	23.8	18.8	15.7	13.6	11.0	9.14	4.85
1.67V/cell	241.9	178.8	145.6	119.0	89.1	65.4	54.6	40.4	32.1	24.0	19.0	15.9	13.7	11.1	9.21	4.88
1.60V/cell	259.9	189.5	151.9	124.8	92.9	68.0	56.7	41.8	33.2	24.8	19.6	16.3	14.0	11.3	9.38	4.97



LP Series-General Purpose LP12-45(12V45Ah)



Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system


General Features

- 10 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate


Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch®IATF 16949, ISO45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

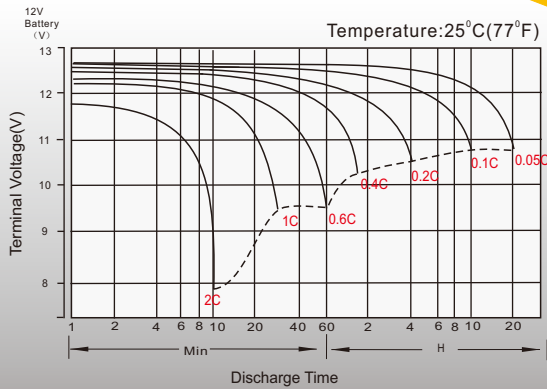


Float Charging Characteristics

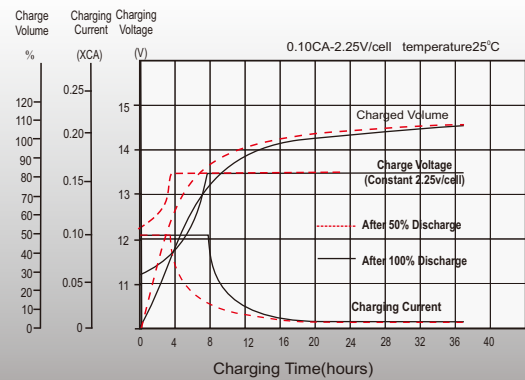

Temperature Effects in Relation to Battery Capacity

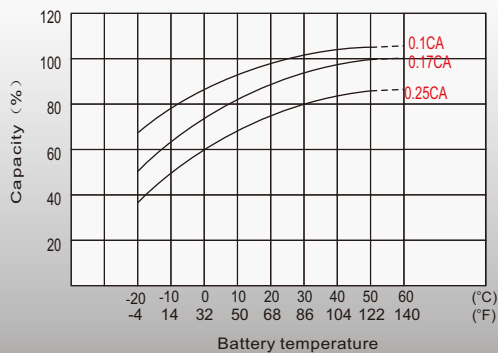

Effect of Temperature on Long Term Float Life

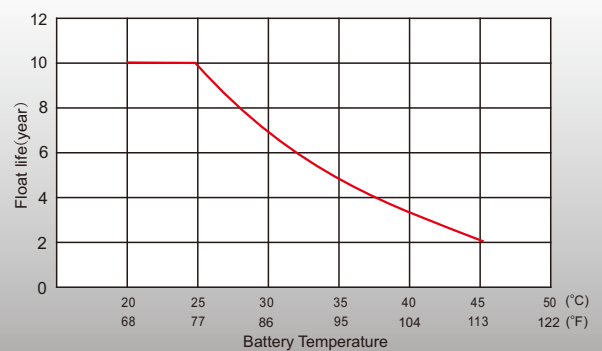

distributed by: Power Storage Deutschland GmbH

+49 (0)6081 96582-0

info@psd-power.de

www.psd-power.de



[Http://www.leoch.com](http://www.leoch.com)

© 2020 LEOCH. All rights reserved.
Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.

Publication No.: LB-LP12-45-PD-EN-V2.1-202110