




LP Series-General Purpose

LP12-2.3(12V2.3Ah)

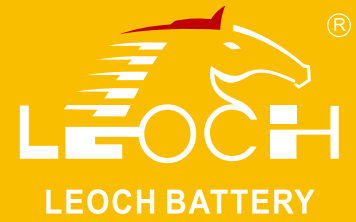


Specifications

Rated Voltage	12V	
Nominal Capacity	2.3Ah	(C ₂₀ , 1.75V/cell)
Dimension	Length	178±2mm (7.00 inches)
	Width	35±1mm (1.38 inches)
	Container Height	60±1mm (2.36 inches)
	Total Height	66±1mm (2.60 inches)
Approx Weight	0.93 Kg (2.05 lbs)	
Terminal	T1	
Container Material	ABS	
Rated Capacity (25°C)	2.30 Ah	(20hr, 0.115A, 1.75V/cell)
	2.16 Ah	(10hr, 0.216A, 1.75V/cell)
	1.98 Ah	(5hr, 0.396A, 1.75V/cell)
	1.76 Ah	(3hr, 0.587A, 1.75V/cell)
	1.45 Ah	(1hr, 1.45A, 1.60V/cell)
Max. Discharge Current	34.5A (5s)	
Internal Resistance (25°C)	Approx 95mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 0.69A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	Initial Charging Current less than 0.69A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LP series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Layout

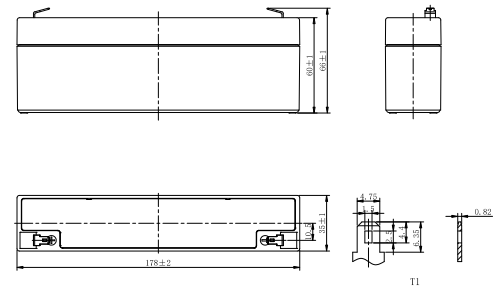

Constant Current Discharge (Amperes) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	6.10	4.48	3.56	2.90	2.16	1.62	1.32	0.989	0.792	0.569	0.453	0.385	0.329	0.259	0.211	0.113
1.80V/cell	6.61	4.71	3.70	2.99	2.21	1.65	1.35	1.01	0.804	0.578	0.459	0.391	0.334	0.262	0.214	0.114
1.75V/cell	7.14	4.94	3.83	3.08	2.27	1.69	1.37	1.02	0.817	0.587	0.466	0.396	0.338	0.265	0.216	0.115
1.70V/cell	7.68	5.17	3.97	3.17	2.32	1.72	1.40	1.04	0.830	0.595	0.472	0.401	0.342	0.269	0.219	0.116
1.67V/cell	7.99	5.31	4.05	3.23	2.35	1.74	1.41	1.05	0.838	0.600	0.476	0.404	0.345	0.271	0.221	0.117
1.60V/cell	8.71	5.63	4.24	3.35	2.42	1.78	1.45	1.07	0.855	0.612	0.485	0.411	0.351	0.275	0.224	0.118

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	11.6	8.58	6.83	5.58	4.17	3.14	2.58	1.93	1.55	1.12	0.892	0.761	0.652	0.514	0.420	0.225
1.80V/cell	12.5	8.96	7.07	5.73	4.26	3.20	2.62	1.96	1.57	1.13	0.903	0.770	0.660	0.519	0.425	0.228
1.75V/cell	13.4	9.35	7.28	5.88	4.34	3.25	2.65	1.98	1.59	1.15	0.914	0.779	0.667	0.525	0.430	0.229
1.70V/cell	14.3	9.73	7.50	6.02	4.42	3.30	2.69	2.01	1.61	1.16	0.925	0.788	0.675	0.531	0.434	0.232
1.67V/cell	14.8	9.96	7.64	6.11	4.47	3.33	2.71	2.03	1.62	1.17	0.931	0.793	0.679	0.535	0.437	0.232
1.60V/cell	16.0	10.5	7.93	6.31	4.58	3.40	2.77	2.06	1.65	1.19	0.947	0.805	0.690	0.543	0.444	0.235



LP Series-General Purpose LP12-2.3(12V2.3Ah)

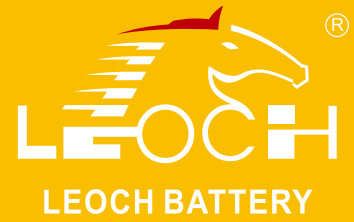

Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system


General Features

- 5 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate


Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch®IATF 16949, ISO45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

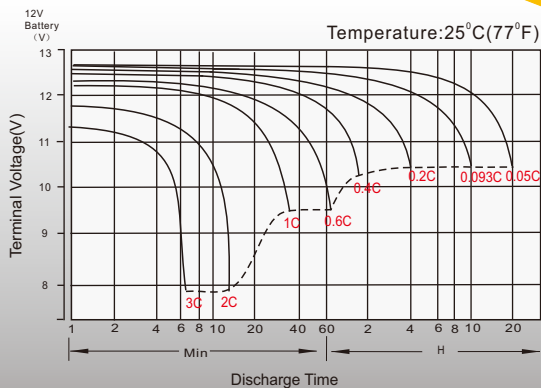


Float Charging Characteristics

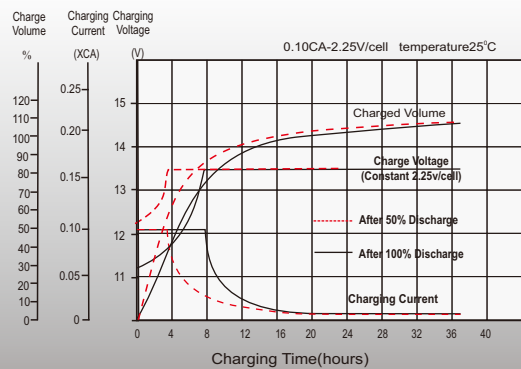

Temperature Effects in Relation to Battery Capacity

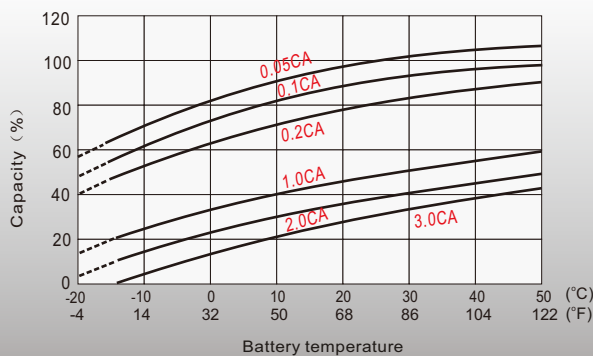

Effect of Temperature on Long Term Float Life

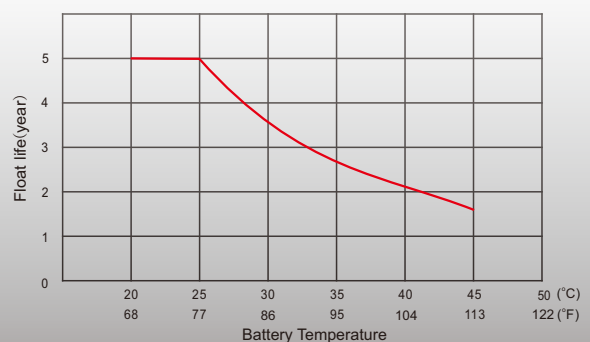

distributed by: Power Storage Deutschland GmbH

+49 (0)6081 96582-0

info@psd-power.de

www.psd-power.de



[Http://www.leoch.com](http://www.leoch.com)

© 2022 LEOCH. All rights reserved.
Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.

Publication No.: LB-LP12-2.3-PD-EN-V3.2-202201