




LPC Series-Deep Cycle

LPC12-100(12V100Ah)

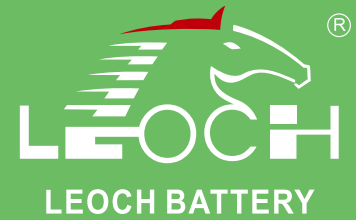


Specifications

Rated Voltage	12V		
Rated Capacity(C ₁₀ , 1.80V/cell)	100Ah		
Dimensions	Length	330±2mm (13.0 inches)	
	Width	173±2mm (6.81 inches)	
	Container Height	212±2mm (8.35 inches)	
	Total Height	220±2mm (8.66 inches)	
Approx Weight	30.6Kg (67.5 lbs)		
Terminal	M8		
Container Material	ABS		
Nominal Capacity(25°C)	105.0Ah	(20hr, 5.25A, 1.80V/cell)	
	100.0Ah	(10hr, 10.0A, 1.80V/cell)	
	91.0Ah	(5hr, 18.2A, 1.75V/cell)	
	82.8Ah	(3hr, 27.6A, 1.75V/cell)	
	72.0Ah	(2hr, 37.0A, 1.75V/cell)	
Short Circuit Current	2000A		
Internal Resistance(25°C)	≤4.9mΩ		
Operating Temp. Range	Discharge	-20 ~ 55°C (-4 ~ 131°F)	
	Charge	0 ~ 40°C (32 ~ 104°F)	
	Storage	-20 ~ 50°C (-4 ~ 122°F)	
Nominal Operating Temp. Range	25±3°C (77±5°F)		
Max.Charging Current(25°C)	25A		
Charge voltage(25°C)	Charge Voltage	Temp. Coefficient	
	Float	2.23~2.27V/cell	-3mV/cell/°C
Effect of temp. to Capacity	Cycle	2.40~2.45V/cell	-4mV/cell/°C
	40°C (104°F)	106%	
	25°C (77°F)	100%	
Self Discharge	0°C (32°F)	86%	
	≤3%/month @ 25°C		



Layout

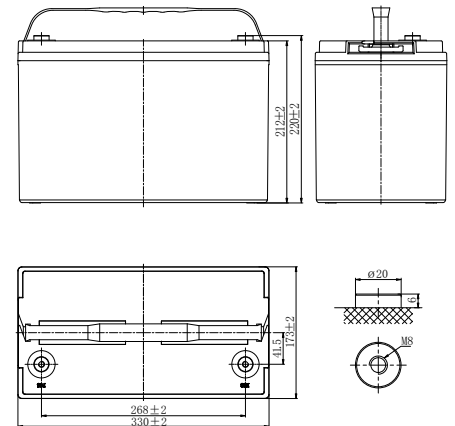

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	128.3	90.2	55.9	34.0	25.0	19.6	17.0	15.0	11.5	9.55	5.07
1.80V/cell	145.4	98.2	57.9	35.2	27.1	20.9	17.9	15.7	12.1	10.0	5.25
1.75V/cell	157.4	100.2	60.7	37.0	27.6	21.3	18.2	15.8	12.2	10.1	5.30
1.70V/cell	167.1	102.2	61.9	37.7	28.2	21.7	18.5	16.0	12.4	10.2	5.36
1.67V/cell	172.0	103.7	62.8	38.3	28.4	22.0	18.9	16.3	12.6	10.3	5.42
1.60V/cell	177.3	105.2	63.8	38.9	28.7	22.3	19.1	16.3	12.7	10.5	5.49


Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	242.9	172.3	108.1	66.2	48.8	38.4	33.5	29.7	22.9	19.0	10.1
1.80V/cell	271.7	186.2	111.3	68.0	52.7	40.9	35.1	30.9	24.0	19.9	10.4
1.75V/cell	289.9	188.5	116.3	71.3	53.6	41.5	35.6	31.1	24.1	20.0	10.5
1.70V/cell	304.8	190.7	118.0	72.5	54.4	42.1	36.1	31.4	24.4	20.2	10.6
1.67V/cell	309.8	192.0	119.0	73.2	54.7	42.6	36.7	31.7	24.7	20.4	10.7
1.60V/cell	314.1	192.8	119.9	73.8	54.9	42.9	37.0	31.8	25.0	20.6	10.9



LPC Series-Deep Cycle

LPC12-100(12V100Ah)

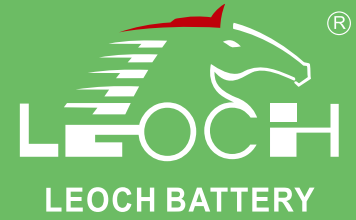

Applications

- Electric tools
- Mobility Scooter
- Golf trolleys
- Portable lights and instruments
- Electric toys
- Portable power
- Electric wheelchair


General Features

- Good cyclic property. Enhanced overcharge endurance and overdischarge recovery property
- Using oxygen recombination technology: maintenance-free
- Lower acid density, excess of electrolyte and larger distance between plates to keep battery at low temperature and slow down plate grid corrosion speed
- Unique plate group configuration, high quality AGM separator and battery management system ensure battery with a longer service life


Standards

- Compliance with BCI standards
- Manufactured in Leoch® IATF 16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities


Discharge Characteristics

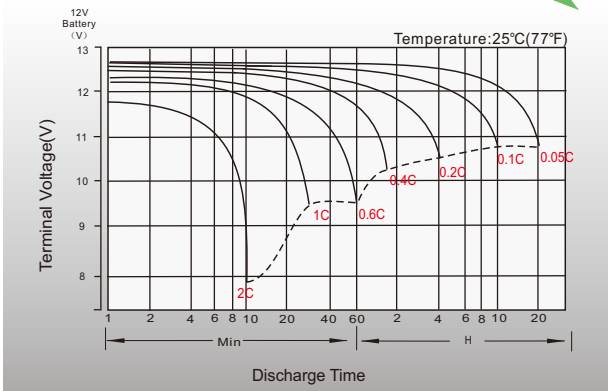


Charging Characteristics

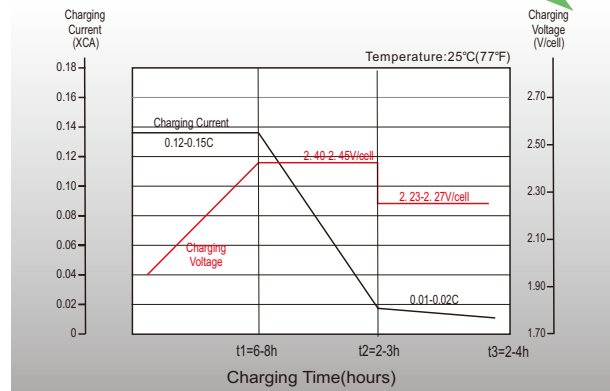

Cycle Life in Relation to Depth of Discharge

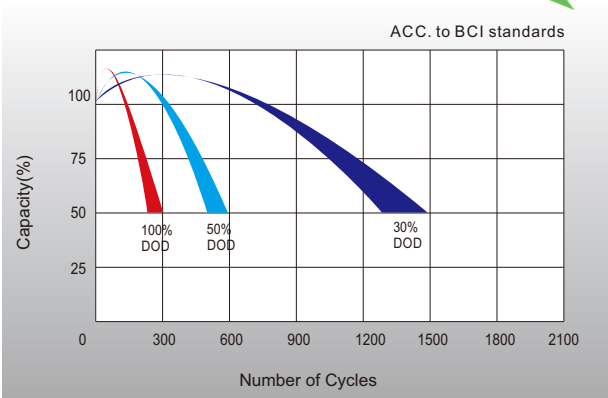

Self Discharge Characteristics

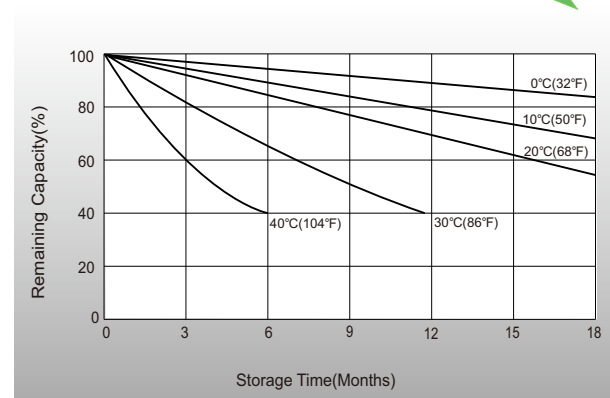

distributed by: Power Storage Deutschland GmbH

+49 (0)6081 96582-0

info@psd-power.de

www.psd-power.de



[Http://www.leoch.com](http://www.leoch.com)

© 2022 LEOCH. All rights reserved.
 Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
 Subject to revisions without prior notice.

Publication No.: LB-LPC12-100-PD-EN-V2.2-202212