



# LPF Series-Front Terminal

## LPF12-100(12V100Ah)




### Specifications

Rated Voltage	12V	
Nominal Capacity	$C_{10}, 1.80V/cell$	100.0Ah
Dimension	Length	394±2mm (15.5 inches)
	Width	110±1.5mm (4.33 inches)
	Container Height	286±2mm (11.3 inches)
	Total Height	286±2mm (11.3 inches)
Approx Weight	31.0 Kg (68.3 lbs)	
Terminal	M6 (M8 is optional)	
Container Material	ABS	
Rated Capacity (25°C)	105.4 Ah	(20hr, 5.27A, 1.80V/cell)
	100.0 Ah	(10hr, 10.0A, 1.80V/cell)
	96.8 Ah	(8hr, 12.1A, 1.75V/cell)
	86.5 Ah	(5hr, 17.3A, 1.75V/cell)
Max. Discharge Current	1000A (5s)	
	Internal Resistance (25°C)	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 30.0A. Voltage 14.1V~14.4V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	Standby Use	
Effect of temp. to Capacity	Initial Charging Current less than 30.0A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
	40°C (104°F)	103%
	25°C (77°F)	100%
Self Discharge	0°C (32°F)	86%
	LPF series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



### Layout

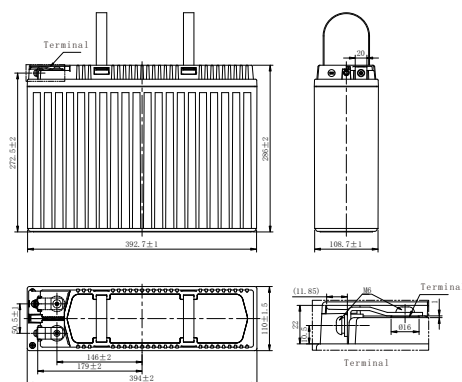

### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	151.7	128.1	117.9	82.7	74.2	52.2	31.3	23.6	18.8	15.7	13.5	11.1	9.32	4.91
1.80V/cell	172.3	149.0	129.0	93.6	78.6	57.7	34.1	25.6	20.3	16.9	14.3	11.9	10.0	5.27
1.75V/cell	189.8	157.6	137.1	97.8	81.6	59.9	35.1	26.2	20.8	17.3	14.4	12.1	10.1	5.29
1.70V/cell	204.3	166.6	144.4	102.1	83.9	62.1	36.2	27.0	21.3	17.7	14.7	12.3	10.2	5.38
1.67V/cell	213.3	171.8	149.4	104.7	85.7	63.4	36.8	27.4	21.6	17.9	14.8	12.4	10.4	5.48
1.60V/cell	221.8	184.1	153.2	110.6	87.0	66.4	38.4	28.4	22.3	18.5	14.9	12.7	10.6	5.58

### Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	288.9	246.1	228.0	159.9	145.6	101.4	61.2	46.3	37.0	31.0	27.2	21.9	18.4	9.9
1.80V/cell	325.8	283.2	248.0	179.3	153.4	111.5	66.3	49.9	39.7	33.2	28.5	23.4	19.6	10.4
1.75V/cell	356.2	296.5	262.2	185.8	158.8	114.8	67.9	51.0	40.6	33.9	28.8	23.8	19.8	10.5
1.70V/cell	378.6	309.8	273.3	192.2	162.0	118.2	69.7	52.3	41.4	34.6	29.2	24.2	20.1	10.7
1.67V/cell	389.0	317.8	279.2	196.0	163.9	120.0	70.6	52.9	41.9	34.9	29.5	24.4	20.3	10.7
1.60V/cell	396.0	334.3	282.3	204.5	164.7	124.7	73.0	54.5	43.1	35.8	29.8	24.9	20.6	10.9



# LPF Series-Front Terminal

## LPF12-100(12V100Ah)



### Applications

- UPS
- For standard power cabinet
- Network connection equipment of communication system
- Power system of special network of local area network
- Power station systems


### General Features

- 12 years design life(25°C)
- Specifically ideal for 19 inches or 23 inches power cabinets
- Front terminals make the installation, maintenance and supervision easy
- Shield designs protect terminals from short circuit and show good appearance
- Unique vent valve design: reduce water losing and prevent air/spark going inside


### Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


### Discharge Characteristics

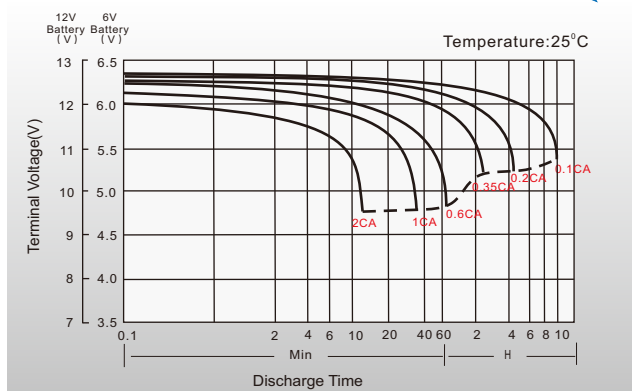


### Float Charging Characteristics

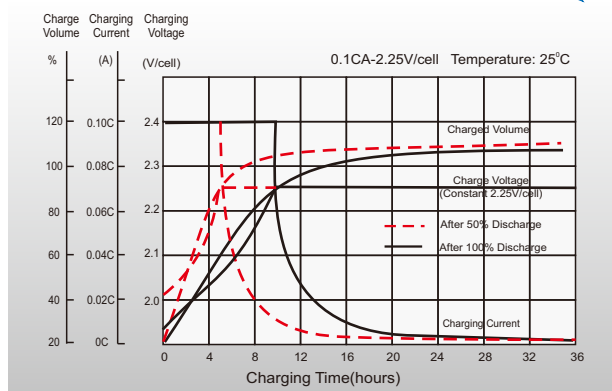

### Temperature Effects in Relation to Battery Capacity

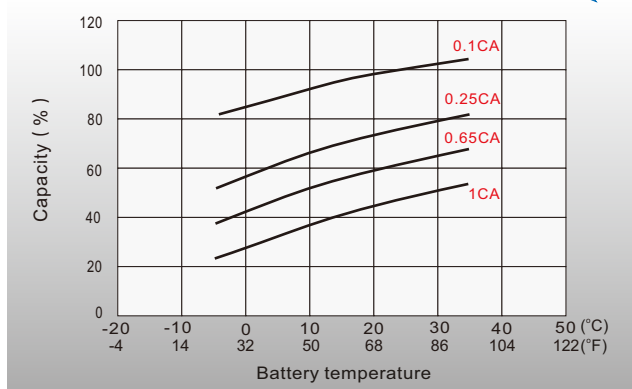

### Effect of Temperature on Long Term Float Life

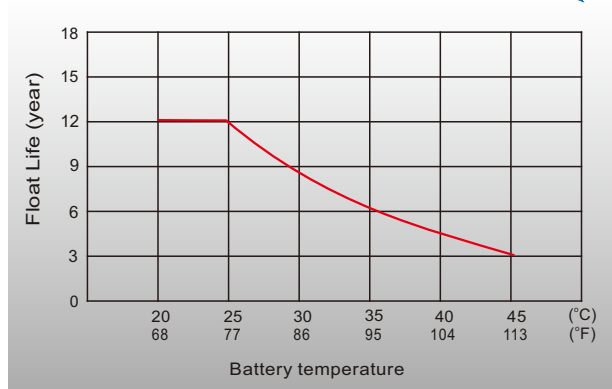

distributed by: Power Storage Deutschland GmbH

+49 (0)6081 96582-0

info@psd-power.de

www.psd-power.de



[Http://www.leoch.com](http://www.leoch.com)

© 2021 LEOCH. All rights reserved.  
Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-LPF12-100-PD-EN-V2.3-202104