




LPL Series-Long Life Standby LPL12-45(12V45Ah)




Specifications

Rated Voltage	12V	
Nominal Capacity	C ₁₀ , 1.80V/cell	45Ah
Dimension	Length	197±2mm (7.76 inches)
	Width	165±2mm (6.50 inches)
	Container Height	170±2mm (6.69 inches)
	Total Height	170±2mm (6.69 inches)
Approx Weight	14.2 Kg (31.3 lbs)	
Terminal	M6	
Container Material	ABS	
Rated Capacity(25°C)	46.8 Ah	C20(2.34A, 1.80V/cell)
	45.0 Ah	C10(4.50A, 1.80V/cell)
	40.6 Ah	C5(8.11A, 1.75V/cell)
	36.9 Ah	C3(12.3A, 1.75V/cell)
	28.4 Ah	C1(28.4A, 1.60V/cell)
Max. Discharge Current	450A (5s)	
Internal Resistance(25°C)	Approx 9 mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Standby Use	Initial Charging Current less than 13.5A. Voltage 2.23V~2.27V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Equalization Use	Initial Charging Current less than 13.5A. Voltage 2.35V~2.40V at 25°C(77°F)Temp. Coefficient -4mV/°C	
Cycle Use	Initial Charging Current less than 13.5A. Voltage 2.40V~2.50V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LPL series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

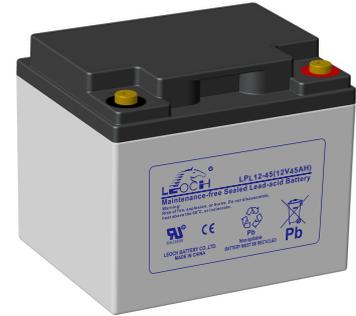

Layout

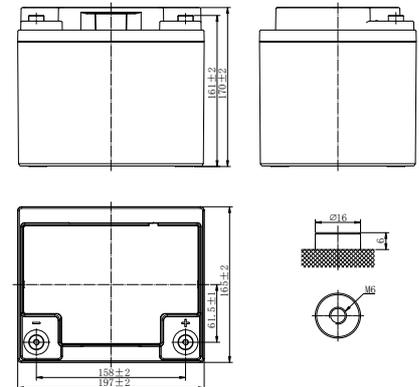

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	71.5	63.3	54.9	43.2	40.2	32.6	24.9	15.2	11.1	8.73	7.57	5.96	5.13	4.25	2.26
1.80V/cell	81.4	71.9	62.2	48.8	43.7	34.8	25.8	15.7	12.1	9.32	7.97	6.27	5.40	4.50	2.34
1.75V/cell	88.4	78.0	67.4	52.7	44.6	35.9	27.1	16.5	12.3	9.49	8.11	6.34	5.43	4.52	2.36
1.70V/cell	94.4	83.1	71.6	55.9	45.5	36.6	27.6	16.8	12.5	9.66	8.24	6.44	5.51	4.54	2.39
1.65V/cell	97.8	85.8	73.6	57.4	46.2	37.1	28.0	17.1	12.7	9.81	8.41	6.55	5.59	4.60	2.42
1.60V/cell	101.3	88.7	75.9	58.9	46.9	37.7	28.4	17.3	12.8	9.92	8.53	6.64	5.66	4.66	2.44

Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	132.5	119.2	104.0	82.1	76.8	62.5	48.1	29.5	21.7	17.1	14.9	11.8	10.2	8.46	4.49
1.80V/cell	148.4	133.3	116.3	91.9	82.9	66.3	49.6	30.3	23.5	18.2	15.6	12.4	10.7	8.85	4.65
1.75V/cell	158.6	142.3	124.1	98.1	84.0	67.9	51.8	31.8	23.9	18.5	15.8	12.4	10.7	8.92	4.69
1.70V/cell	166.8	149.6	130.5	103.1	84.9	68.8	52.6	32.3	24.2	18.7	16.1	12.5	10.6	9.01	4.73
1.65V/cell	169.5	152.0	132.6	104.8	85.5	69.3	53.0	32.6	24.4	19.0	16.3	12.8	11.0	9.11	4.79
1.60V/cell	171.8	154.1	134.5	106.2	85.9	69.7	53.4	32.9	24.5	19.1	16.5	12.9	11.1	9.20	4.84



LPL Series-Long Life Standby LPL12-45(12V45Ah)



Applications

- UPS and EPS
- Emergency light
- Railway signal and aircraft signal system
- Marine and power stations
- Alarm and security system
- Electronic apparatus and equipment
- Communication power supply, DC power supply


General Features

- 12 years design life (25°C)
- Grid refining technology and the thicker plates are used to extend the battery standby life and reduce the plate grid corrosion speed
- Using oxygen recombination technology: maintenance-free
- Unique vent valve design: control water losing, prevent air and spark going inside


Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

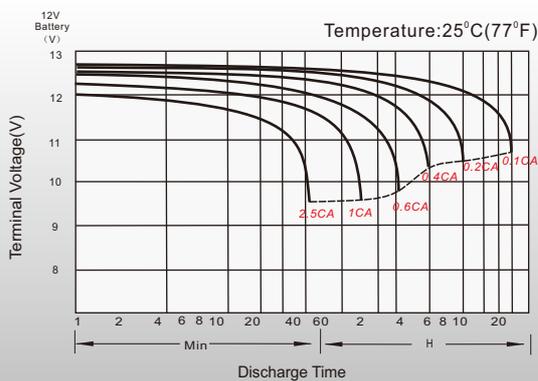


Float Charging Characteristics

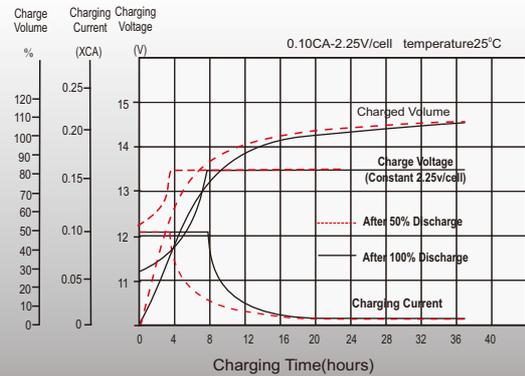

Temperature Effects in Relation to Battery Capacity

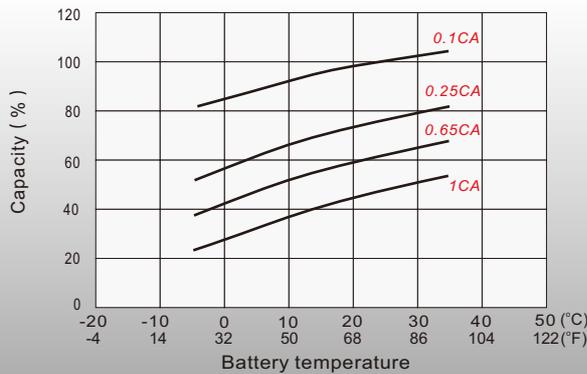

Effect of Temperature on Long Term Float Life

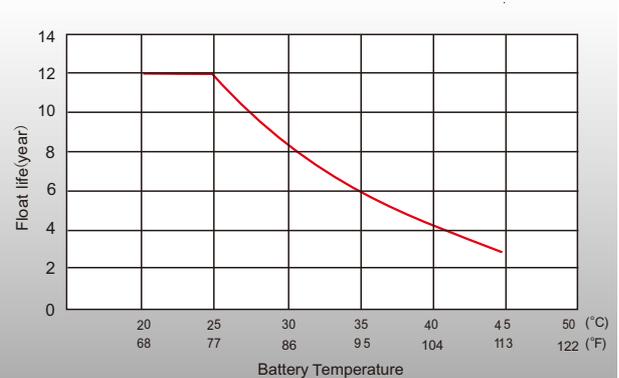

distributed by: Power Storage Deutschland GmbH

+49 (0)6081 96582-0

info@psd-power.de

www.psd-power.de



[Http://www.leoch.com](http://www.leoch.com)

© 1999-2020 LEOCH. All rights reserved.
Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.

Publication No.: LB-LPL12-45-PD-EN-V3.1-202110