




LPL Series-Long Standby Life LPL12-75(12V75Ah)

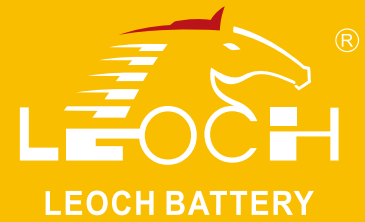


Specifications

Rated Voltage	12V	
Nominal Capacity	75.0Ah	(C ₁₀ , 1.80V/cell)
Dimension	Length	260±2mm (10.2 inches)
	Width	168±2mm (6.61 inches)
	Container Height	208±2mm (8.19 inches)
	Total Height	214±2mm (8.43 inches)
Approx Weight	22.7 Kg (50.05 lbs)	
Terminal	M6	
Container Material	ABS	
Rated Capacity (25°C)	78.0 Ah	(20hr, 3.90A, 1.80V/cell)
	75.0 Ah	(10hr, 7.50A, 1.80V/cell)
	67.5 Ah	(5hr, 13.5A, 1.75V/cell)
	61.5 Ah	(3hr, 20.5A, 1.75V/cell)
	47.3 Ah	(1hr, 47.3A, 1.60V/cell)
Max. Discharge Current	750A (5s)	
Internal Resistance (25°C)	Approx 7.5mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 22.5A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	Standby Use	
Effect of temp. to Capacity	Initial Charging Current less than 22.5A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
	40°C (104°F)	103%
	25°C (77°F)	100%
Self Discharge	0°C (32°F)	86%
	LPL series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Layout

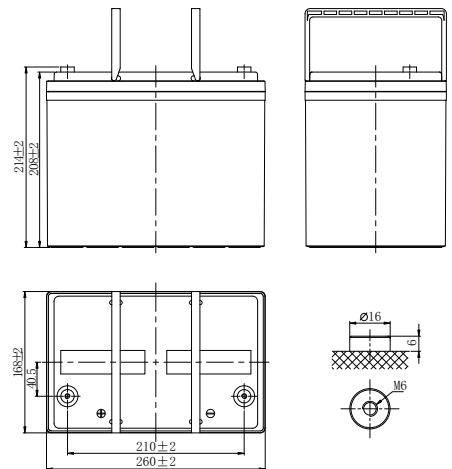

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	109.8	95.2	74.9	67.0	49.0	41.5	25.3	18.5	14.5	12.6	11.1	8.56	7.09	3.76
1.80V/cell	124.7	107.9	84.7	72.9	51.9	43.0	26.1	20.1	15.5	13.3	12.0	9.00	7.50	3.90
1.75V/cell	135.2	116.8	91.4	74.4	53.8	45.1	27.5	20.5	15.8	13.5	12.0	9.05	7.52	3.94
1.70V/cell	144.2	124.1	96.9	75.9	54.8	46.0	28.0	20.9	16.1	13.7	12.1	9.19	7.57	3.98
1.65V/cell	148.7	127.7	99.6	77.0	55.6	46.7	28.4	21.1	16.3	14.0	12.2	9.32	7.67	4.03
1.60V/cell	153.8	131.7	102.1	78.1	56.4	47.3	28.8	21.3	16.5	14.2	12.2	9.44	7.76	4.07


Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	206.7	180.3	142.5	128.0	94.2	80.2	49.2	36.2	28.5	24.9	22.0	17.0	14.1	7.49
1.80V/cell	231.2	201.7	159.4	138.2	99.1	82.6	50.5	39.1	30.3	26.0	23.5	17.8	14.7	7.75
1.75V/cell	246.7	215.3	170.1	140.0	102.1	86.3	53.0	39.8	30.8	26.4	23.6	17.9	14.9	7.82
1.70V/cell	259.4	226.3	178.8	141.6	103.4	87.6	53.8	40.4	31.2	26.8	23.7	18.1	15.0	7.89
1.65V/cell	263.6	230.0	181.7	142.6	104.3	88.4	54.4	40.6	31.6	27.2	23.8	18.3	15.2	7.98
1.60V/cell	267.3	233.2	184.2	143.2	104.8	89.0	54.8	40.8	31.8	27.5	23.7	18.5	15.3	8.06



LPL Series-Long Standby Life

LPL12-75(12V75Ah)

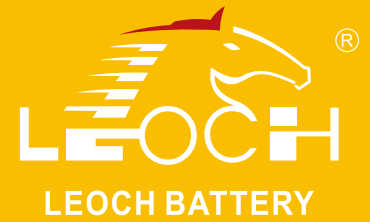

Applications

- UPS and EPS
- Emergency light
- Railway signal and aircraft signal system
- Marine and power stations
- Alarm and security system
- Electronic apparatus and equipment
- Communication power supply, DC power supply


General Features

- 12 years design life (25°C)
- Grid refining technology and the thicker plates are used to extend the battery standby life and reduce the plate grid corrosion speed
- Using oxygen recombination technology: maintenance-free
- Unique vent valve design: control water losing, prevent air and spark going inside


Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

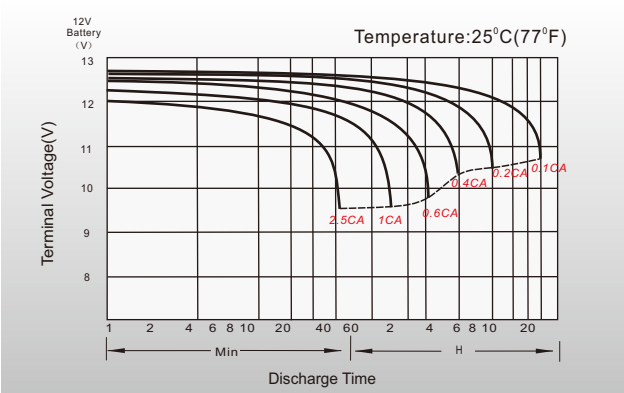


Float Charging Characteristics

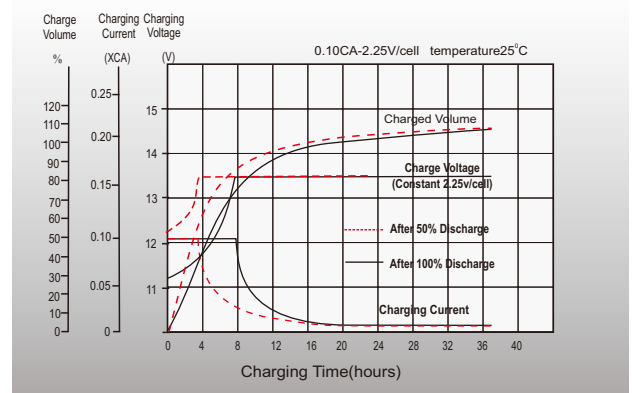

Temperature Effects in Relation to Battery Capacity

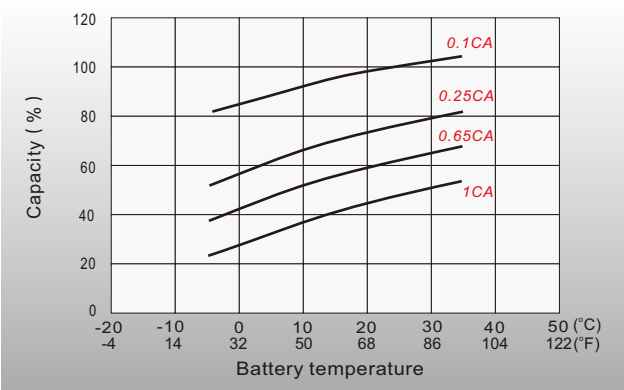

Effect of Temperature on Long Term Float Life

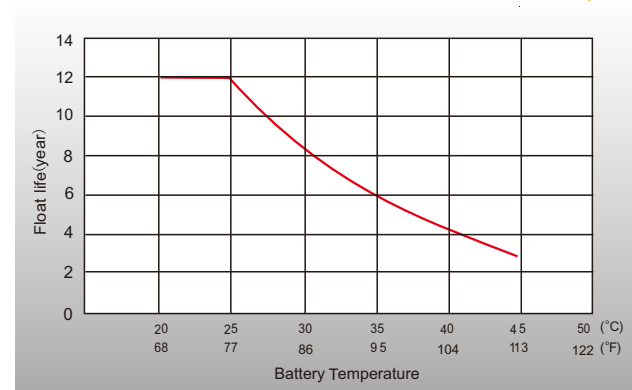

distributed by: Power Storage Deutschland GmbH

+49 (0)6081 96582-0

info@psd-power.de

www.psd-power.de



<http://www.leoch.com>

© 2020 LEOCH. All rights reserved.
 Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
 Subject to revisions without prior notice.

Publication No.: LB-LPL12-75-PD-EN-V2.1-202110